

**RAYMOND WEIL**  
GENEVE

INSTRUCTIONS FOR USE

SELF-WINDING MECHANICAL WATCH  
WITH MOON PHASE



RAYMOND WEIL  
GENEVE

Automatic

SWISS MADE


## INTRODUCTION

Congratulations on your choice of a watch from the prestigious RAYMOND WEIL collection, a dynamic expression of masterful design and the constant objective of supreme quality that have been the hallmarks of the brand since its creation.


Your RAYMOND WEIL watch was hand-assembled by our master watchmakers according to the most rigorous quality standards of the Swiss watch industry.

In order to guarantee that your RAYMOND WEIL watch will function perfectly for many years to come, please pay close attention to the advice contained in these instructions for use as well as in the international guarantee.

Your watch has a self-winding mechanical movement with an exclusive complication module, and it has a running reserve of 41 hours.

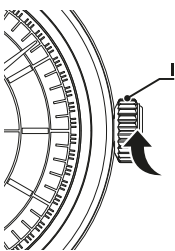

**NB:** if your watch has stopped, before any adjustment it is necessary to wind it manually by turning the crown clockwise 20-30 times in position (I). When you wear the watch, it will wind automatically with the natural movements of your wrist.

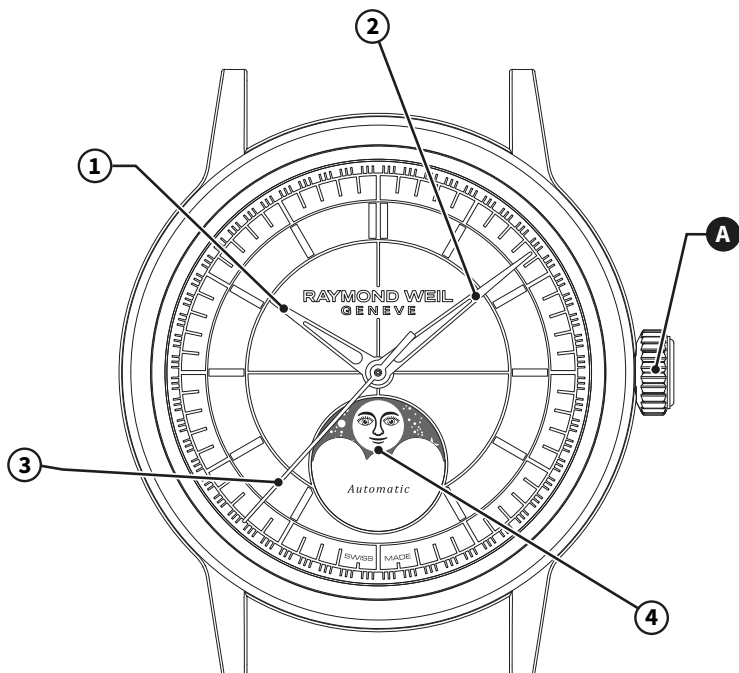SELF-WINDING MECHANICAL WATCH  
WITH MOON PHASE

① Hours hand

② Minutes hand

③ Seconds hand

④ Moon phase indicator


Ⓐ Crown

I Normal or winding position

II Adjustment of the date and moon phase

III Adjustment of the time and stop seconds

## INSTRUCTIONS FOR USE




**NB:** After any adjustment, always push the crown back in to the normal position (I) in order to keep your watch water-resistant.

### ADJUSTMENT OF THE TIME

1. Pull out the crown to position (III). The second hand will stop.
2. Adjust the time by turning the crown in the desired direction.
3. Push the crown back in to position (I). The second hand will start moving again.

**NB:** At each changeover at midnight (24 hours), the moon phase advance one position.



### RAPID ADJUSTMENT THE MOON PHASE

**NB:** For perfect synchronization, adjustment of the moon phase must be done after having made all the other adjustments described above.

1. Pull out the crown to position (II).
2. Adjust the moon phase by turning the crown counter clockwise.
3. Push the crown back in to position (I).

